


m o o o i<sup>®</sup>

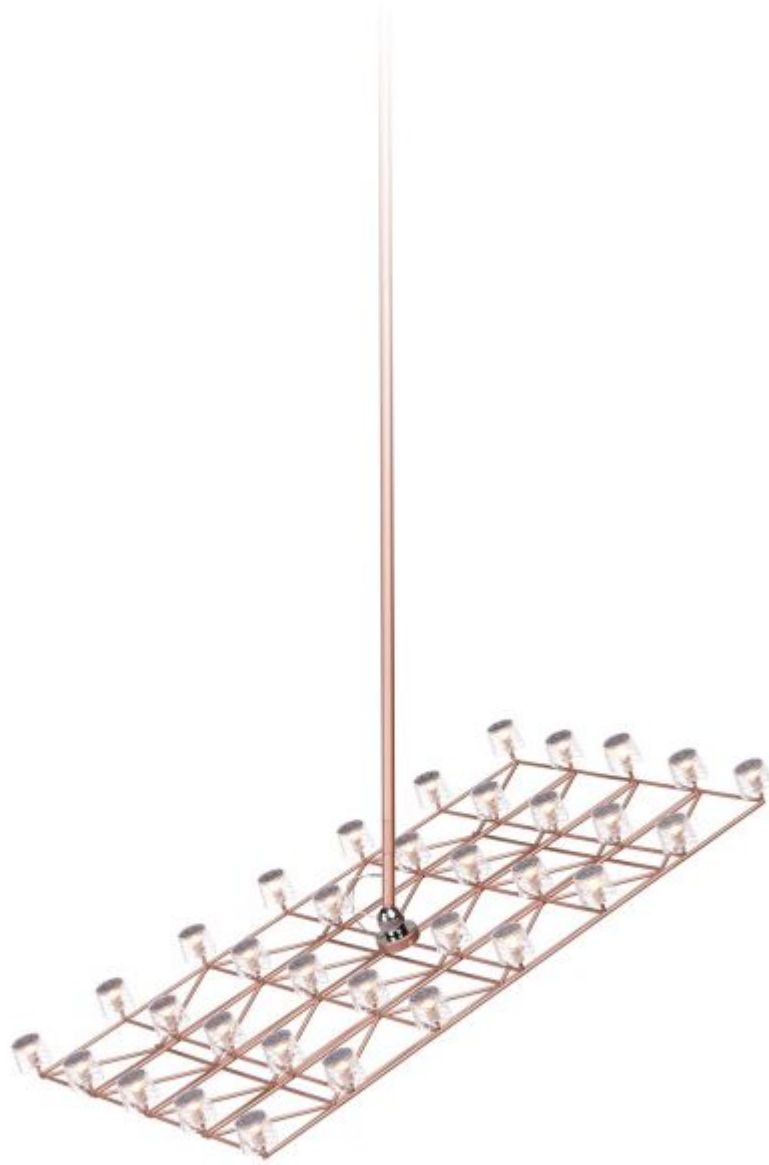

## Space-Frame Small

---

by Marcel Wanders

*powered through Electro Sandwich by Marcel Wanders*

Space-Frame by Marcel Wanders shares the same refined freedom of not being bound or limited by cables, and takes it a step further by claiming complete independence. In fact its strong architectural frame, a geometrical net of light metal wires and transparent lights, hangs on a hinge that allows it to change position in space.

---

<b>Designer</b>	Marcel Wanders
<b>Year of design</b>	2015

---

m o o o i<sup>®</sup>

**Material**

Metal wire frame, poly carbonate lenses, ultra thin suspension wire.

**Additional**

Powered through Electrosandwich by Marcel Wanders

---

## technical (ce)



Input voltage of 220-240V ~50Hz AC  
Voltage on lamp < 5V DC (actual lamp surface functions as conductor!)

**Amount of LED's:**

34

**Colour temperature (degrees Kelvin, K) Colour rendering index:**

2700K (warm white, comparable to incandescent) CRI\_Ra > 80

**Luminous flux (Lumen, lm):**

163 lm

**Power consumption**

Small: MAX 17W

Mains Dimmable

**Cable length**

4M | 13.1ft (transparent) can be shortened down to 30cm | 11.8".

(10M | 32.8ft on request)

**Cable colour**

Transparent with tinned cores

**Canopy**

Cylinder in matching finish: copper & nickel.

**Suspension poles**

You can adjust the length of the suspension pole. Enclosed with the Space-Frame there are 6 parts of suspension poles in 3 different sizes: 2x10cm (3.9"), 2x15 cm (5.9"), 2x50cm (19.6"). Total 1.5M | 4.9". Additional poles are available.



---

## Technical (ul)

# m o o o i<sup>®</sup>



Input voltage of 110-127V~60Hz AC

Voltage on lamp < 5V DC (actual lamp surface functions as conductor!)

**Amount of LED's:**

34

**Colour temperature (degrees Kelvin, K) Colour rendering index:**

2700K (warm white, comparable to incandescent) CRI\_Ra > 80

**Luminous flux (Lumen, lm):**

400 lm

**Power consumption**

Small: MAX 9W

**Mains Dimmable**

**Cable length**

4M | 13.1ft (transparent) can be shortened down to 30cm | 11.8".

(10M | 32.8ft on request)

**Cable colour**

Transparent with tinned cores

**Canopy**

Cylinder in matching finish: copper & nickel.

**Suspension poles**

You can adjust the length of the suspension pole. Enclosed with the Space-Frame there are 6 parts of suspension poles in 3 different sizes: 2x10cm (3.9"), 2x15 cm (5.9"), 2x50cm (19.6"). Total 1.5M | 4.9". Additional poles are available.



---

## Recommended dimmer specs

For fluent dimming behaviour we advise a dimmer that is compatible with the following specs:

**Transformer type:** Magnetic

**Load type:** Inductive load (L-Type)

**Dimmer type:** Leading edge / Forward phase

*Please note the functioning of the dimmer and the power supply combination can never be predicted, it always needs to be tested in practice.*

# m o o o i<sup>®</sup>

---

## Colours




Copper



Nickel

---

## dimensions



19cm | 7,5"



7cm | 2,8"



13cm | 5,1"



63cm | 24,8"



43cm | 16,9"

# m o o o i<sup>®</sup>

---

## packaging

H 25 cm | 9,8"

W 53 cm | 20,9"

D 133 cm | 52,4"

Colli 1/1

Product weight:

7 KG | 15,4 lb

With packaging:

8,5 KG | 18,7 lb